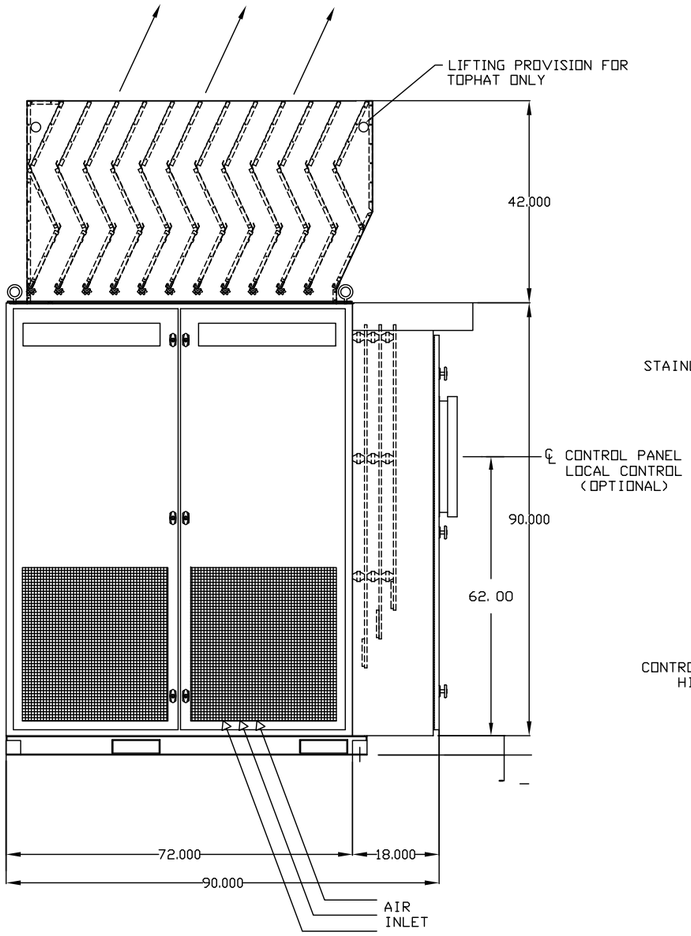


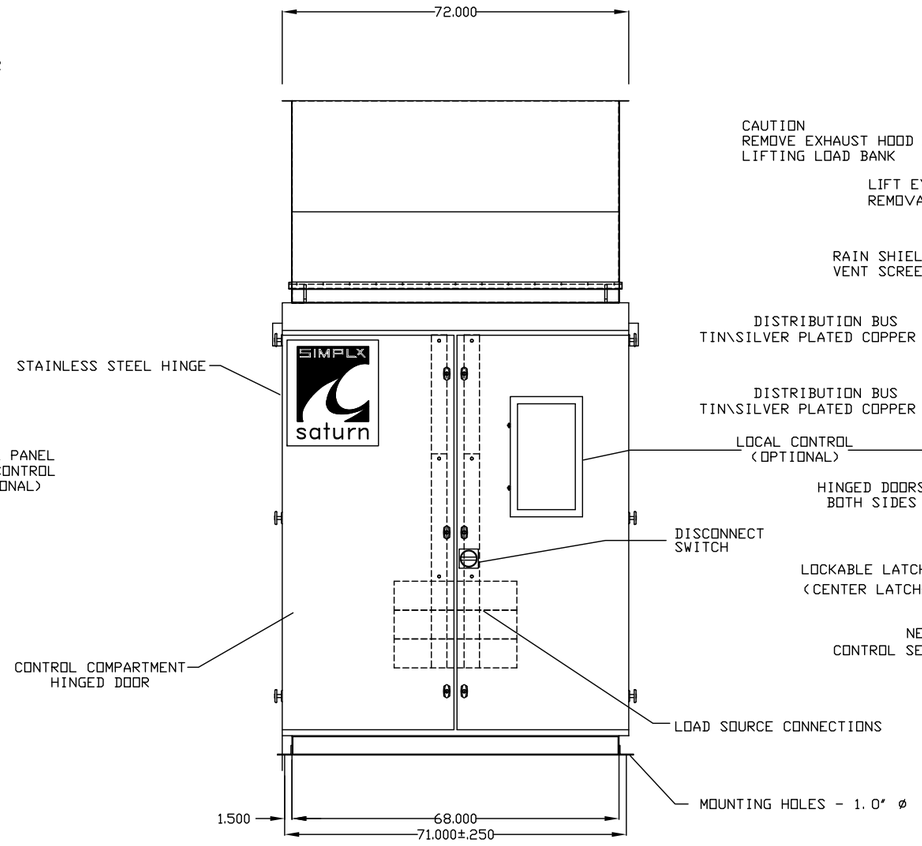


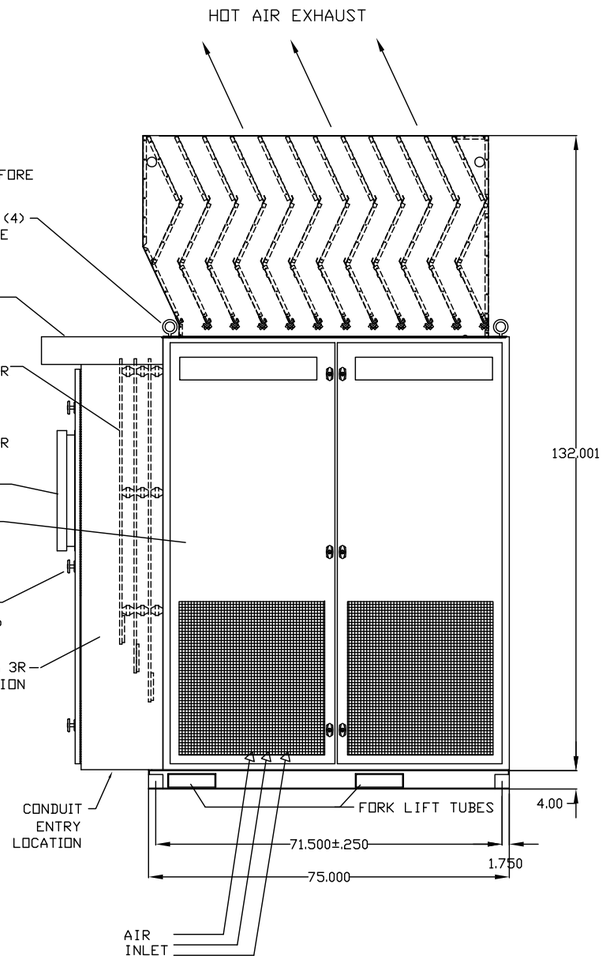


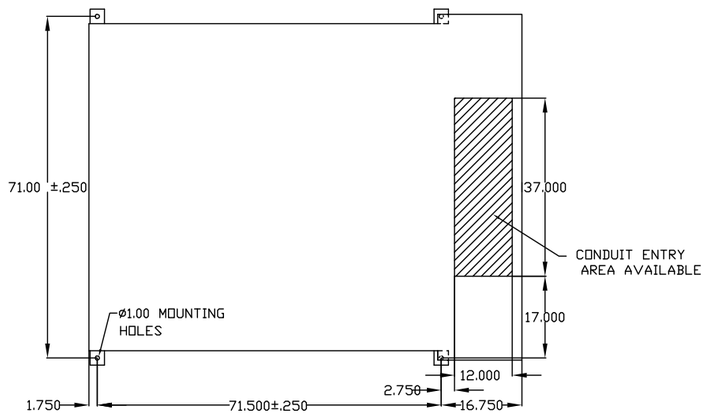


NOTES:

1. BOTTOM OF CONTROL COMPARTMENT AVAILABLE FOR CONDUIT ENTRY.
2. CONSTRUCTION: ALL WELDED FORMED STEEL FRAME, DOORS, PANELS AND SKID. SKID AND STRUCTURAL MEMBERS 7GA HRS, OUTER SHELL 12GA HRS AND HINGED DOORS 14GA HRS. ALL HINGES, EXTERIOR FASTENERS, AND EXTERIOR HARDWARE ARE STAINLESS STEEL EXHAUST HOOD IS GALVANIZED SHEET STEEL, RIVETED
3. SURFACE PREPARATION: ABRASIVE CLEANED OR CHEMICALLY CLEANED AND PHOSPHATIZED
   FINISH COLOR: ASA 49 GRAY
   PRIMER: RECOATABLE EPOXY PRIMER
   (24702600), PART G, B67H5 BUFF PRIMER
   (24702700), PART H, B67V5 CATALYST
   PAINT: POLANE HS PLUS POLYURETHANE
   (24702800), F63JXA5108-1407 ASA 49 GRAY
   (24702801), V66V55 CATALYST
   (24702802), V66VB11 ACCELERATOR
4. APPROXIMATE SHIPPING WEIGHT: 5,000 LBS. TOTAL UNIT
   : 3,800 LBS. LOAD BANK
   : 1,200 LBS. TOP HAT

THE INFORMATION HEREON IS THE PROPERTY OF SIMPLEX, INC., AND/OR ITS SUBSIDIARIES. WITHOUT WRITTEN PERMISSION ANY COPYING, TRANSMITTAL TO OTHERS AND USE EXCEPT THAT FOR WHICH IT IS LOANED IS PROHIBITED. DESIGN SUBJECT TO CHANGE WITHOUT NOTICE.
©2010 SIMPLEX, INC. ALL RIGHTS RESERVED.

SIMPLEX® SPRINGFIELD, ILLINOIS

| SCALE : | APPROVED BY : | DRAWN BY : RER |
|---|---|---|
| DATE : 08-02-10 | | REVISED : |

SATURN LOAD BANK PICTORIAL

STANDARD

DRAWING NUMBER 211946