
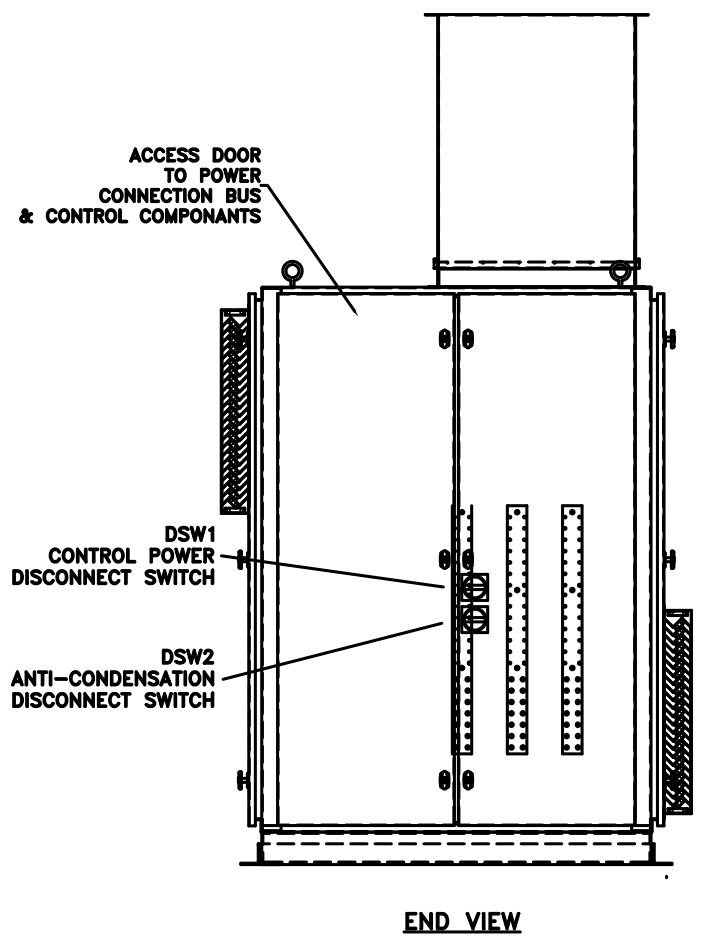
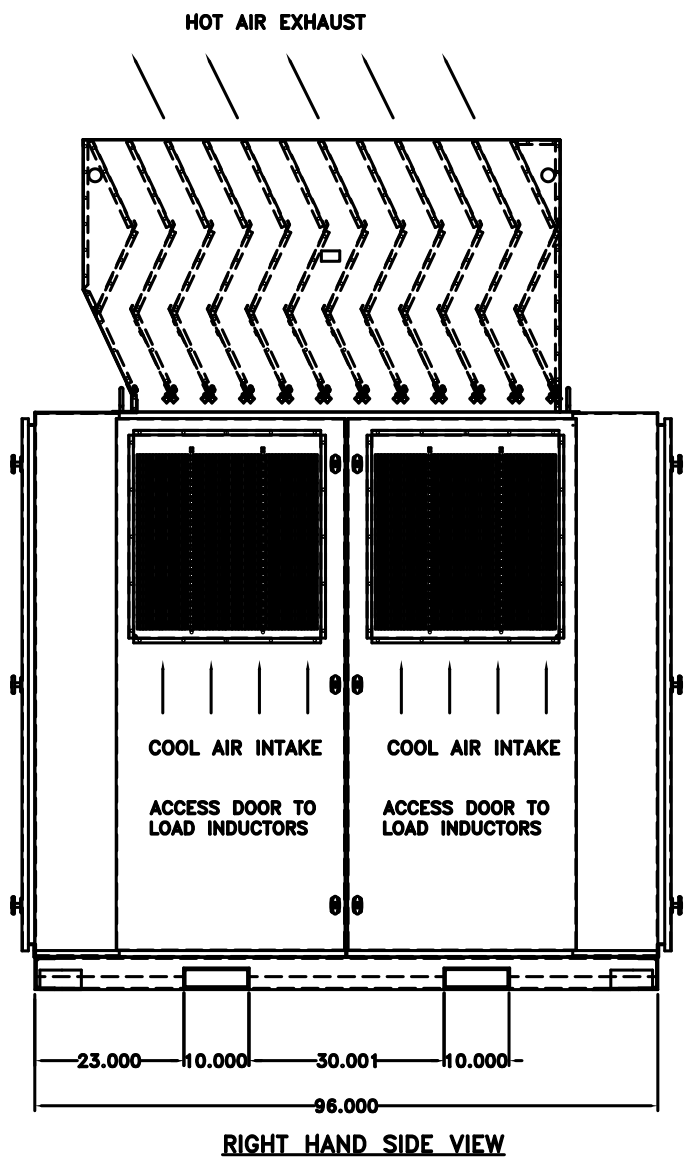
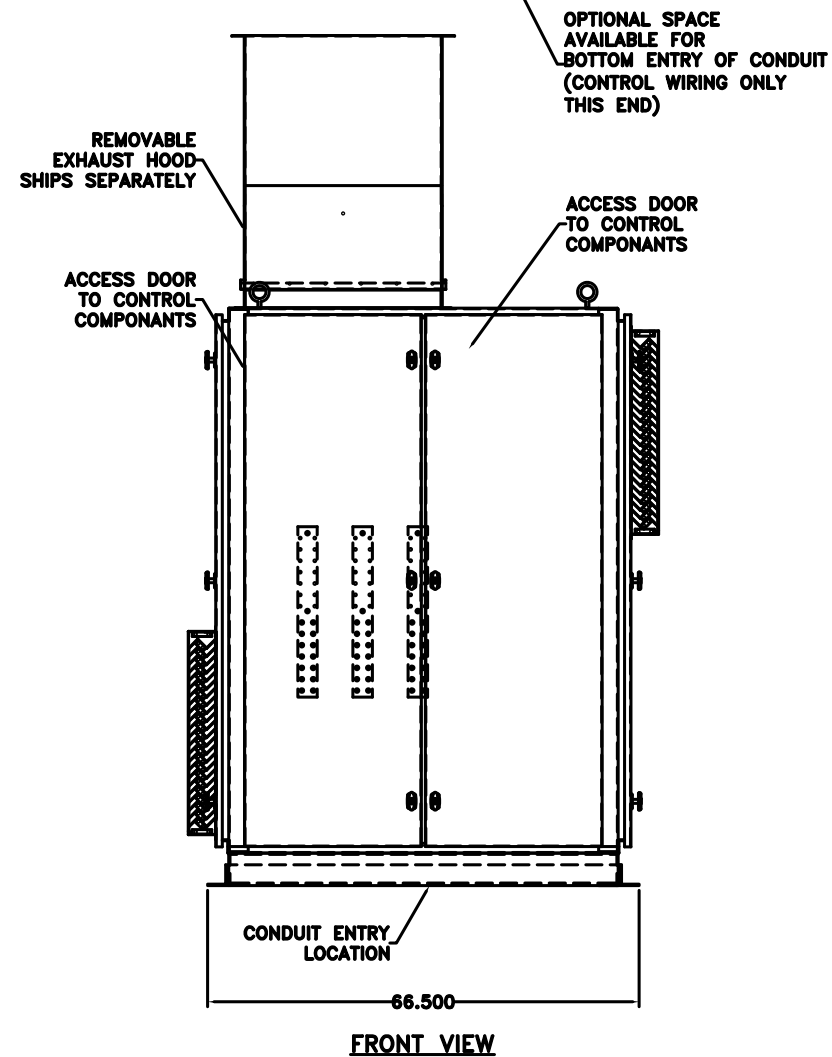


NOTES:

1. CONSTRUCTION: ALL WELDED, FORMED STEEL FRAME AND SKID.
DOORS AND PANELS: FORMED AND WELDED SHEET STEEL
EXHAUST HOOD: GALVANIZED SHEET STEEL, RIVETED
2. SURFACE PREPARATION: ABRASIVE CLEANED OR CHEMICALLY CLEANED AND PHOSPHATIZED
FINISH COLOR: ASA 49 GRAY
PRIMER: TILE CLAD WB EPOXY
(24702501), PART A, B73A200, GRAY PRIMER
(24702502), PART B, B73V200, CATALYST
PAINT: CENTURION POLYURETHANE
(24708500), B65W711, ASA 49 GRAY
(24722500), B65V700, CATALYST
3. APPROXIMATE WEIGHT: 9,000 LBS.
4. MINIMUM CLEARANCE FOR DOOR SWING AND AIR INTAKE - 38 INCHES
5. SEE ELECTRICAL COMPONENT LAYOUT-2 FOR CONTROL WIRING COMPONENTS.
6. SEE ELECTRICAL COMPONENT LAYOUT-1 FOR CONTROL COMPONENTS AND LOCATION OF LOAD POWER AND GROUND CONNECTION BUS BARS.

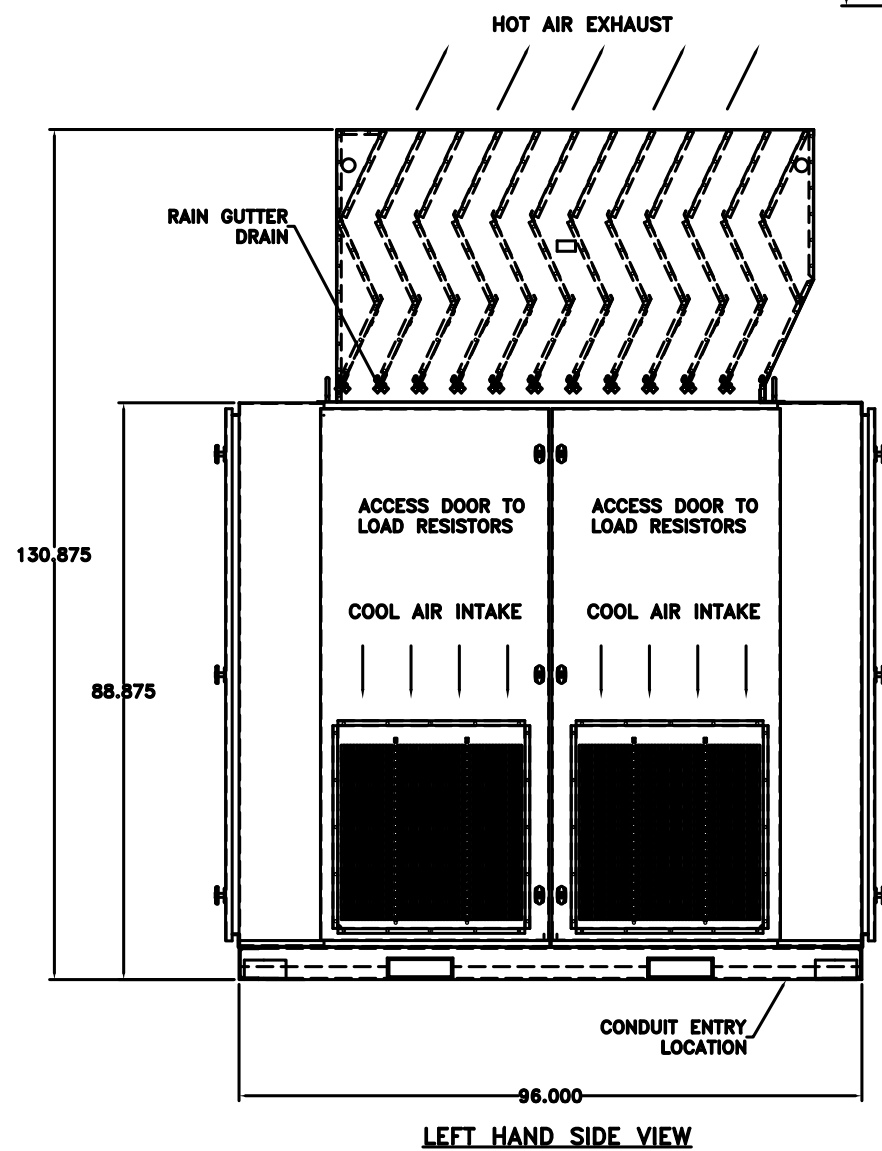

THE INFORMATION HEREON IS THE PROPERTY OF SIMPLEX, INC., AND/OR ITS SUBSIDIARIES. WITHOUT WRITTEN PERMISSION ANY COPYING, TRANSMITTAL TO OTHERS AND USE EXCEPT THAT FOR WHICH IT IS LOANED IS PROHIBITED.
© 2010 SIMPLEX, INC., ALL RIGHTS RESERVED

SIMPLEX		SPRINGFIELD, ILLINOIS
QTY	APPROVED BY :	DRAWN BY : RER
DATE : 08-02-10		TEMP #
TITAN LOAD BANK PICTORIAL		
STANDARD		DRAWING NUMBER 212477