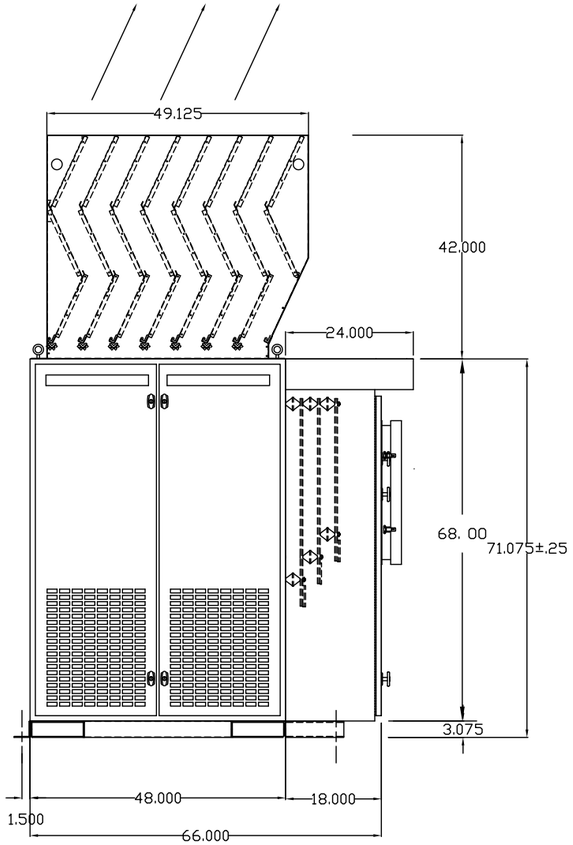

LEFT SIDE VIEW

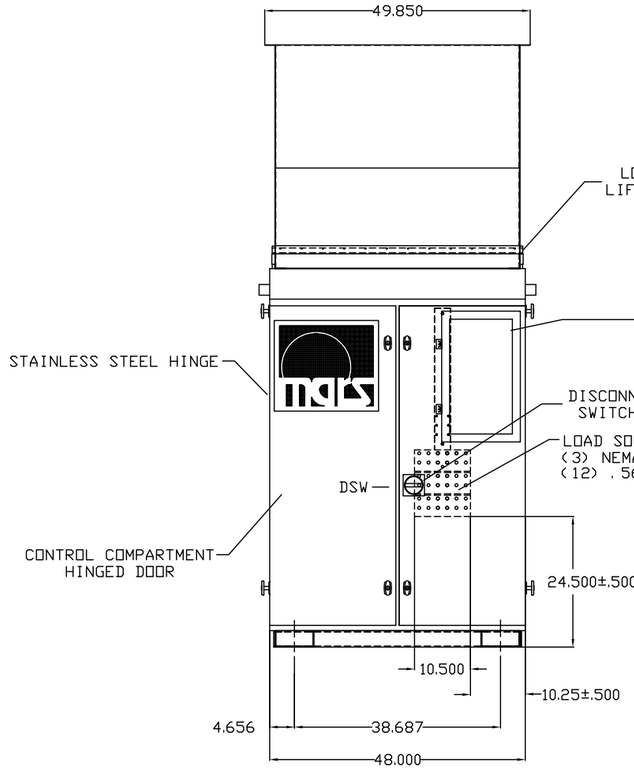

FRONT VIEW

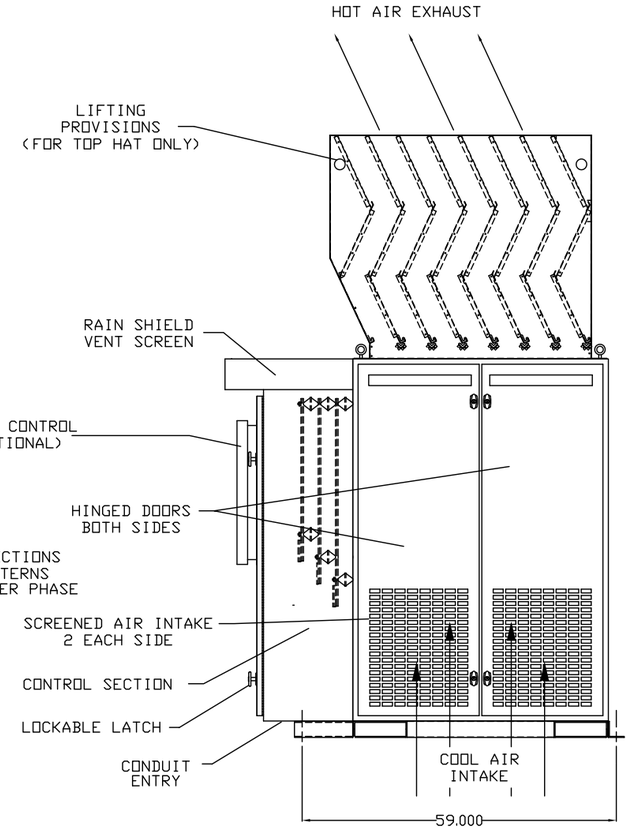

RIGHT SIDE VIEW

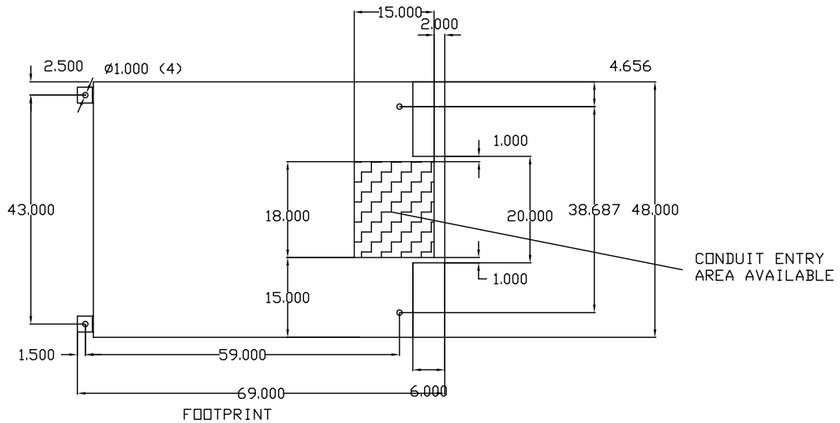

FOOTPRINT

NOTES:

1. BOTTOM OF CONTROL COMPARTMENT AVAILABLE FOR CONDUIT ENTRY.
2. CONSTRUCTION: ALL WELDED FORMED STEEL FRAME, DOORS, PANELS AND SKID. FORK LIFT TUBES 7GA HRS, OUTER SHELL 12GA HRS, BASE SKID, CONTROL BOX AND DOORS 14GA HRS, FAN/ELEMENT DOORS 16GA HRS ALL HINGES, EXTERIOR FASTENERS, AND EXTERIOR HARDWARE ARE STAINLESS STEEL EXHAUST HOOD IS GALVANIZED SHEET STEEL, RIVETED
3. SURFACE PREPARATION: ABRASIVE CLEANED OR CHEMICALLY CLEANED AND PHOSPHATIZED
   FINISH COLOR: ASA 49 GRAY
   PRIMER: RECOATABLE EPOXY PRIMER
   (24702600), PART G, B67H5 BUFF PRIMER
   (24702700), PART H, B67V5 CATALYST
   PAINT: POLANE HS PLUS POLYURETHANE
   (24702800), F63JXA5108-1407 ASA 49 GRAY
   (24702801), V66V55 CATALYST
   (24702802), V66VB11 ACCELERATOR
4. APPROXIMATE SHIPPING WEIGHT: 2,370 LBS TOTAL UNT
   : 1,800 LBS LOAD BANK
   : 570 LBS TOP HAT

THE INFORMATION HEREON IS THE PROPERTY OF SIMPLEX, INC., AND/OR ITS SUBSIDIARIES. WITHOUT WRITTEN PERMISSION ANY COPYING, TRANSMITTAL TO OTHERS AND USE EXCEPT THAT FOR WHICH IT IS LOANED IS PROHIBITED. DESIGN SUBJECT TO CHANGE WITHOUT NOTICE.
©2010 SIMPLEX, INC. ALL RIGHTS RESERVED.

SIMPLEX® SPRINGFIELD, ILLINOIS

SCALE :	APPROVED BY :	DRAWN BY : RER
DATE : 08-02-10		REVISED :

MARS LOAD BANK PICTORIAL

STANDARD | DRAWING NUMBER 211944